



41NM, 42NM 4.5^φ × 15

GLASS TUBE FUSE (FAST-BLOW)

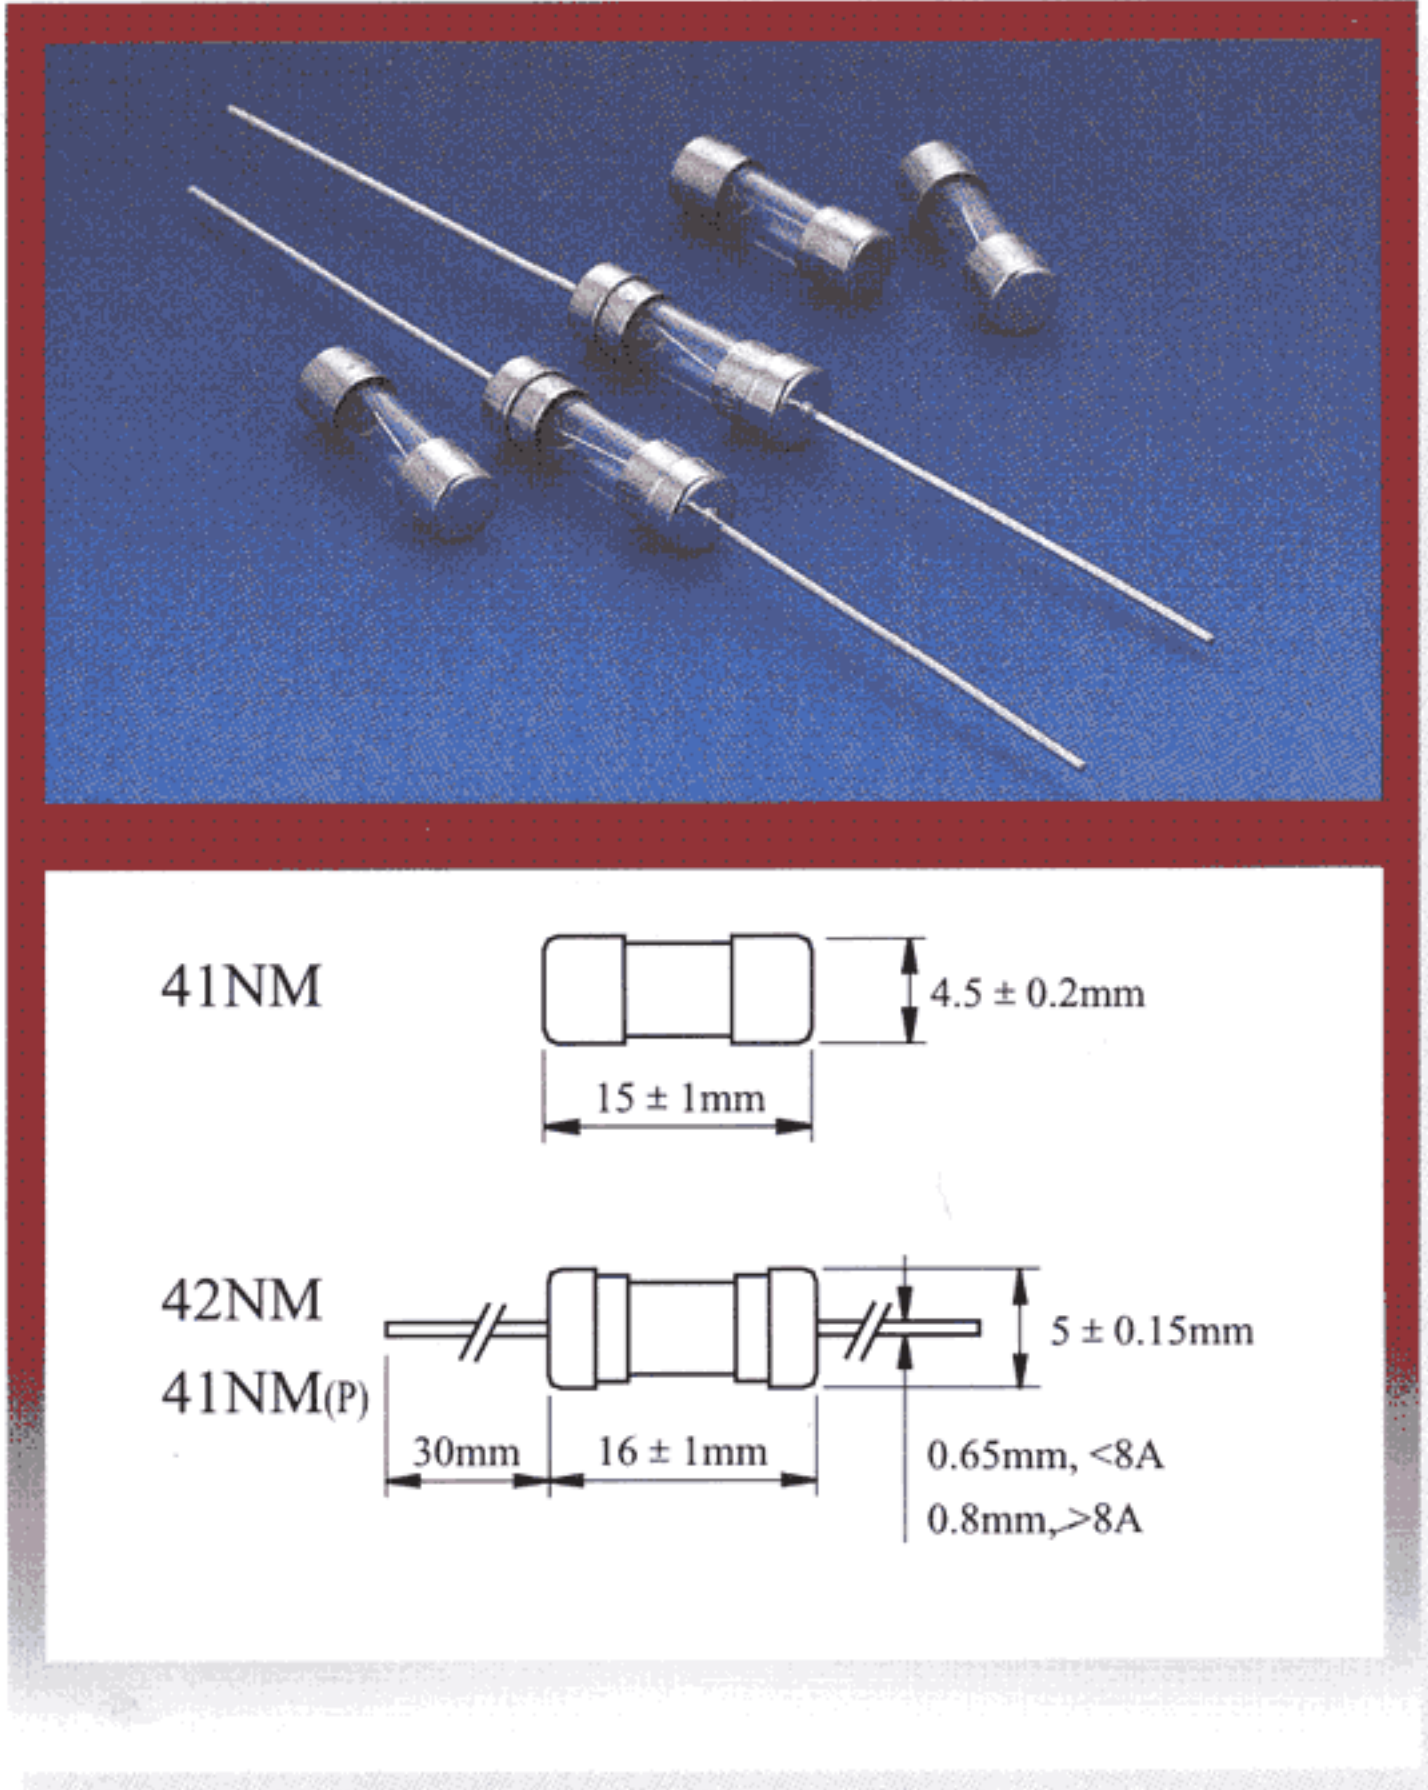

I-T CHARACTERISTICS CURVE

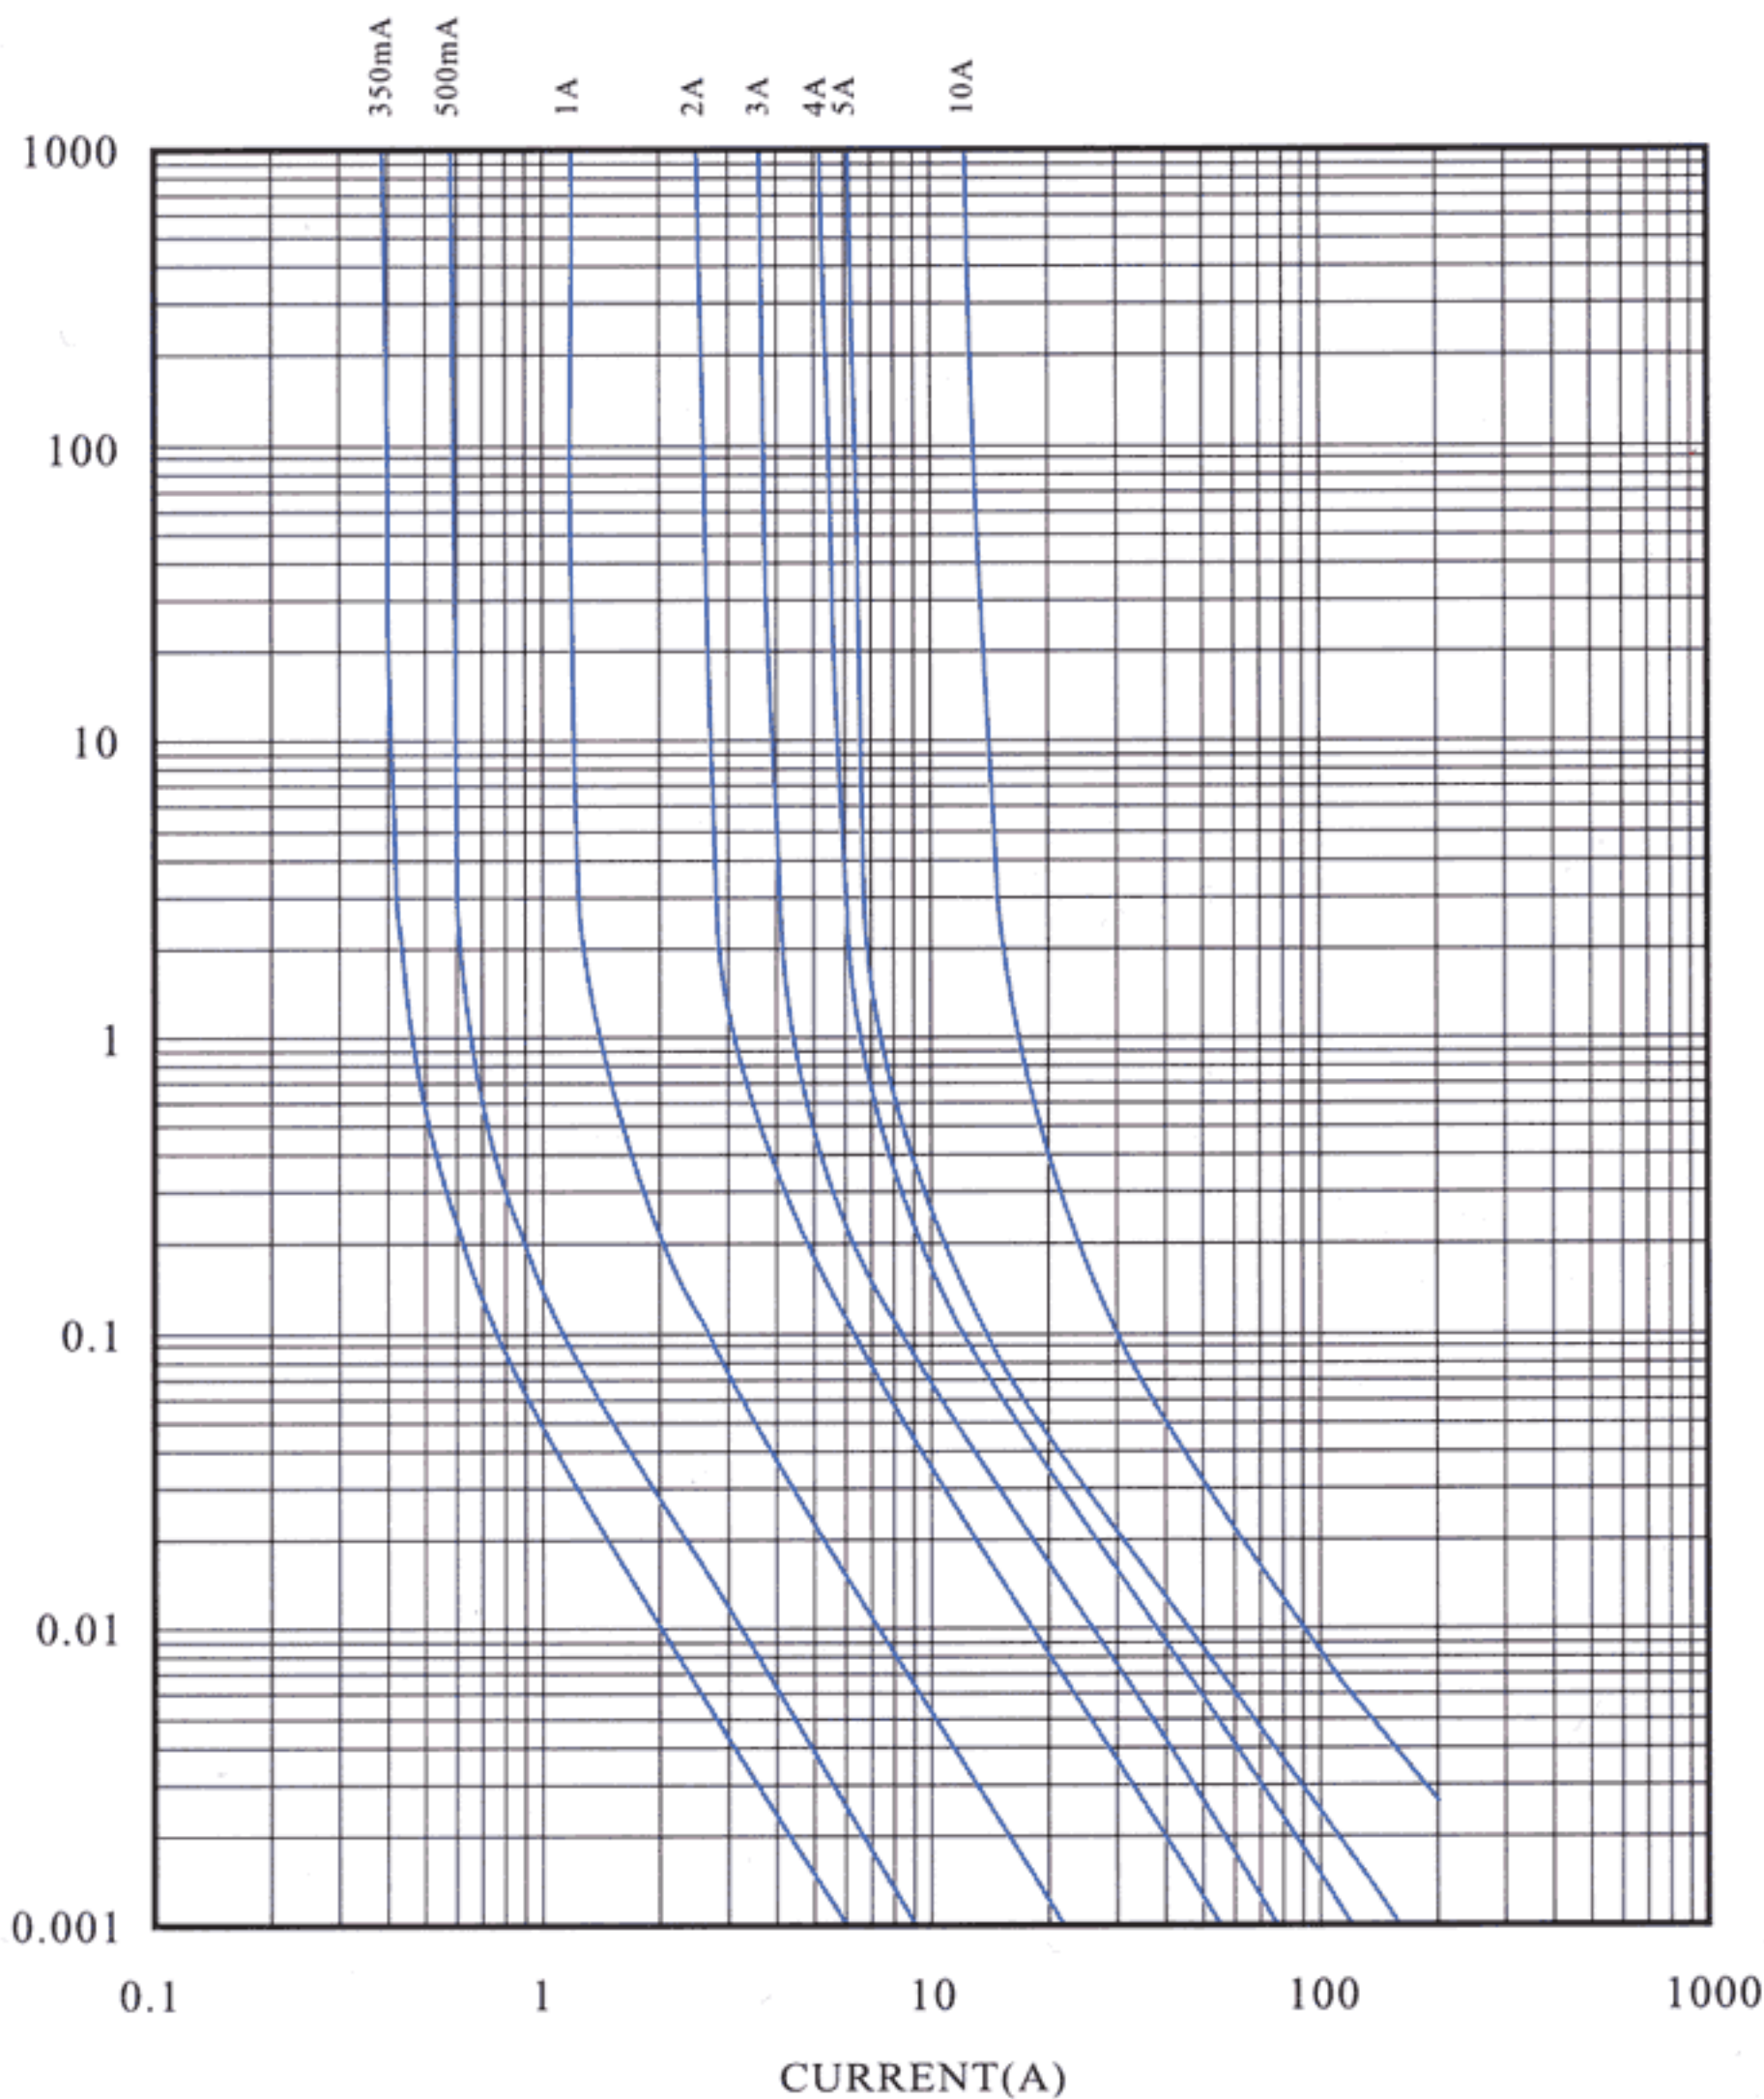

CATALOG NO.	AMPERE RATING	APPROVALS						I ² T REFERENCE (A ² .S)
		UR			PSE		KT	
		H ₁	H ₂	L	H ₂	L	H ₂	
0300H ₁ /H ₂ /L	300mA	●	●	●			●	0.025
0315H ₁ /H ₂ /L	315mA	●	●	●			●	0.029
0350H ₁ /H ₂ /L	350mA	●	●	●			●	0.036
0375H ₁ /H ₂ /L	375mA	●	●	●			●	0.044
0400H ₁ /H ₂ /L	400mA	●	●	●			●	0.056
0500H ₁ /H ₂ /L	500mA	●	●	●			●	0.096
0600H ₁ /H ₂ /L	600mA	●	●	●			●	0.18
0630H ₁ /H ₂ /L	630mA	●	●	●			●	0.22
0750H ₁ /H ₂ /L	750mA	●	●	●			●	0.29
0800H ₁ /H ₂ /L	800mA	●	●	●			●	0.40
010H ₁ /H ₂ /L	1A	●	●	●	●	●	●	0.49
012H ₁ /H ₂ /L	1.2A	●	●	●	●	●	●	0.84
013H ₁ /H ₂ /L	1.25A	●	●	●	●	●	●	1.2
015H ₁ /H ₂ /L	1.5A	●	●	●	●	●	●	1.8
016H ₁ /H ₂ /L	1.6A	●	●	●	●	●	●	2.1
020H ₁ /H ₂ /L	2A	●	●	●	●	●	●	3.2
023H ₁ /H ₂ /L	2.25A	●	●	●	●	●	●	5.2
025H ₁ /H ₂ /L	2.5A	●	●	●	●	●	●	6.3
030H ₁ /H ₂ /L	3A	●	●	●	●	●	●	7.7
032H ₁ /H ₂ /L	3.15A	●	●	●	●	●	●	9
035H ₁ /H ₂ /L	3.5A	●	●	●	●	●	●	11
040H ₁ /H ₂ /L	4A	●	●	●	●	●	●	14
050H ₁ /H ₂ /L	5A	●	●	●	●	●	●	22
060H ₁ /H ₂ /L	6A				●	●	●	36
063H ₁ /H ₂ /L	6.3A				●	●	●	39
070H ₁ /H ₂ /L	7A				●	●	●	50
080H ₁ /H ₂ /L	8A				●	●	●	69
090H ₁ /H ₂ /L	9A				●	●	●	88
100H ₁ /H ₂ /L	10A				●	●	●	105
120H ₁ /H ₂ /L	12A				●	●	●	161
150H ₁ /H ₂ /L	15A				●	●	●	251

H₁ DENOTES FOR 300V
H₂ DENOTES FOR 250V
L DENOTES FOR 125V
● DENOTES FOR APPROVED

INTERRUPTING RATING:
50 amperes at 300V AC (300mA-5A)
50 amperes at 250V AC (300mA-2.25A)
100 amperes at 250V AC (2.5A-5A)
100 amperes at 250V AC (1A-15A) PSE
500 amperes at 125V AC (1A-15A) PSE

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
135%	1 hour Max
200%	5 sec Max